
Internetworking with Sockets

Cross-host Interprocess Communication (IPC)

- ▶ Typically client-server model over network
- ▶ Server - Provides a service
- ▶ Server - Waits for clients to connect
- ▶ Clients - Connect to utilize the service
- ▶ Clients - Possibly more than one at a time

The Internet Protocol

- ▶ Each device in a network is assigned an IP address
- ▶ IPv4 32 bit, IPv6 128 bit
- ▶ Each device may host many services
- ▶ Accessing a service requires an IP,port pair
- ▶ Services you know of: ssh (port 22), http (port 80), DNS (port 53), DHCP

Common Service Use Cases

Browse the World Wide Web

- ▶ Each device has a static IP
- ▶ DNS used to translate `www.google.com` to `74.125.43.103`
- ▶ Contact service at `74.125.43.103` and port 80 (`http`)


Common Service Use Cases

Your home network.


- ▶ You turn on your modem/router. It gets a public IP address from you ISP (e.g., 79.166.80.131)
- ▶ Your modem/router runs a DHCP server giving IPs in block 192.168.x.y
- ▶ Your modem/router acts as an Internet gateway. Translates IPs from 192.168.x.y to 79.166.80.131. IP Masquerade.
- ▶ What if you need to set up a service running inside your 192.168.x.y network available to the internet? Port forwarding.

The Transmission Control Protocol

- ▶ TCP uses acknowledgments
- ▶ Non-acknowledged messages are retransmitted
- ▶ Messages re-ordered by the receiver's OS network stack
- ▶ Application sees a properly ordered data stream

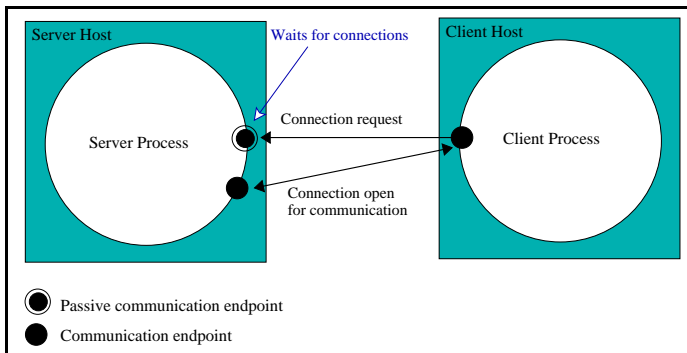

TCP - multiple clients

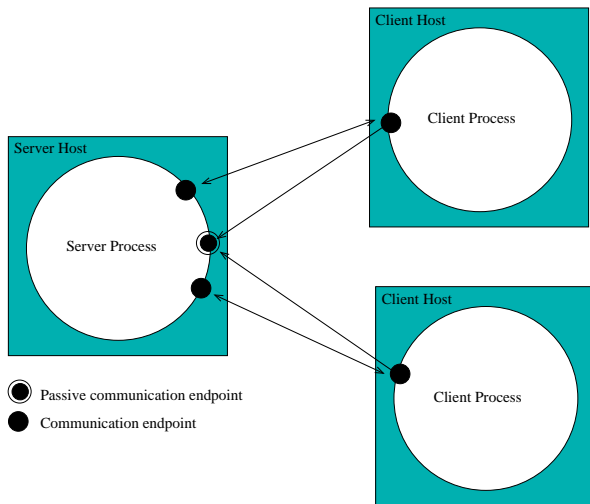

Sockets

- ▶ A *socket* is a communication endpoint
- ▶ Processes refer to a socket using an integer descriptor
- ▶ Communication domain
 - ▶ Internet domain (over internet)
 - ▶ Unix domain (same host)
- ▶ Communication type
 - ▶ Stream (usually TCP)
 - ▶ Datagram (usually UDP)

TCP vs UDP

| | TCP | UDP |
|------------------------|-------------|------------|
| Connection Required | ✓ | ✗ |
| Reliability | ✓ | ✗ |
| Message Boundaries | ✗ | ✓ |
| In-Order Data Delivery | ✓ | ✗ |
| Socket Type | SOCK_STREAM | SOCK_DGRAM |
| Socket Domain | Internet | Internet |
| Latency | higher | lower |
| Flow Control | ✓ | ✗ |

Serial Server (TCP)

Create listening socket a

loop

Wait for client request on a

Open two-way channel b with client

while request received through b **do**

 Process request

 Send response through b

end while


Close file descriptor of b

end loop

Drawbacks:

- ▶ Serves only one client at a time
- ▶ Other clients are forced to wait or even fail

1 process per client model

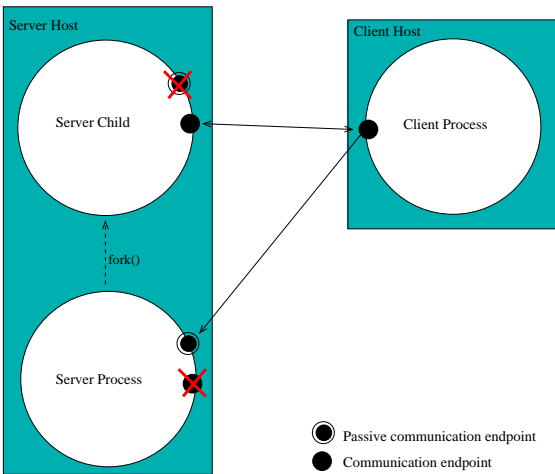

- ▶ New process forked for each client
- ▶ Multiple clients served at the same time
- ▶ Inefficient, too many clients → too many processes

1 process per client model

Parent process

Create listening socket a

loop

Wait for client request on a

Create two-way channel b with client

Fork a child to handle the client

Close file descriptor of b

end loop

Child process

Close listening socket a

Serve client requests through b


Close private channel b

Exit

Parent process: why close file descriptor *b*?

- ▶ Parent doesn't need this file descriptor
- ▶ Risk of running out of file descriptors otherwise
- ▶ Enables the destruction of the channel once the other two parties (child & client) close their file descriptors
- ▶ Enables the child process to receive EOF after the client closes its end of the channel (and vice versa).

Multithreaded server model

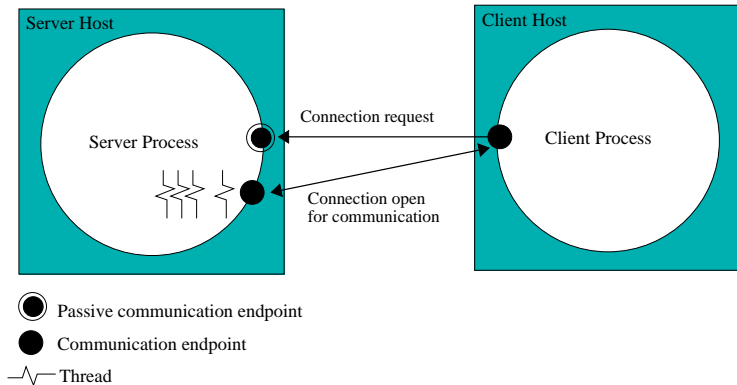

- ▶ Multiple threads handle multiple clients concurrently
- ▶ Drawback: Requires synchronization for access to shared resources

Dealing with byte order

- ▶ Byte order poses a problem for the communication among different architectures.
- ▶ Convention: ip addresses, port numbers etc. in *Network Byte Order*
- ▶ Convert long/short integers between *Host* and *Network* byte order

```
uint32_t htonl(uint32_t hostlong);  
uint16_t htons(uint16_t hostshort);  
uint32_t ntohl(uint32_t netlong);  
uint16_t ntohs(uint16_t netshort);
```

From Domain Names to Addresses and back

- ▶ An *address* is needed for network communication
- ▶ We often have to *resolve* the address from a domain name.
ex. spiderman.di.uoa.gr ↔ 195.134.66.107


```
struct hostent {
    char    *h_name;      /* official name of host */
    char    **h_aliases; /* aliases (alt. names) */
    int     h_addrtype; /* usually AF_INET */
    int     h_length;   /* bytelength of address */
    char    **h_addr_list; /* list of addresses */
};
struct hostent *gethostbyname(const char *name);
struct hostent *gethostbyaddr(const void *addr, socklen_t
    len, int type);
```

- ▶ Beware, both use static storage for struct hostent. (problem?)
- ▶ For error reporting use herror & hstrerror


Our goal

Create the communication endpoint. Use it as a file descriptor.

Server Process



Client Process



request for connection establishment

request

response

Creating sockets

- ▶ *socket* creates an endpoint for communication
- ▶ returns a descriptor or -1 on error

```
#include <sys/socket.h>
#include <sys/types.h>

int socket(int domain, int type, int protocol);
```

domain communication domain (usual. PF_INET)

type communication semantics (usual. SOCK_STREAM,
SOCK_DGRAM)

protocol Use 0 as typically only one protocol is available

```
if ((sock = socket(AF_INET, SOCK_STREAM, 0)) == -1)
    perror("Socket creation failed!");
```

Binding sockets to addresses

- ▶ *bind* requests for an address to be assigned to a socket
- ▶ You must bind a SOCK_STREAM socket to a local address before receiving connections

```
int bind(int socket, const struct sockaddr *address, socklen_t address_len);
```

Internet domain (AF_INET):

- ▶ We pass a *sockaddr_in* struct as the *address*

Interesting fields:

`sin_family` address family is AF_INET in the internet domain

`sin_addr.s_addr` address can be a specific IP or INADDR_ANY

`sin_port` TCP or UDP port number

Socket binding example

```
#include <netinet/in.h> /* for sockaddr_in */
#include <sys/socket.h>
#include <sys/types.h>
#include <arpa/inet.h> /* for hton* */

int bind_on_port(int sock, short port) {
    struct sockaddr_in server;
    server.sin_family = AF_INET;
    server.sin_addr.s_addr = htonl(INADDR_ANY);
    server.sin_port = htons(port);
    return bind(sock, (struct sockaddr *) &server, sizeof(
        server));
}
```

- ▶ INADDR_ANY is a special address (0.0.0.0) meaning “any address”
- ▶ sock will receive connections from all addresses of the host machine

listen, accept

```
int listen(int socket, int backlog);
```

- ▶ Listen for connections on a socket
- ▶ At most *backlog* connections will be queued waiting to be accepted

```
int accept(int socket, struct sockaddr *address, socklen_t *address_len);
```

- ▶ Accept a connection on a socket
- ▶ Blocks until a client connects or interrupted by signal
- ▶ Returns new socket descriptor used to communicate with client
- ▶ Returns info on client's address through *address*. Pass NULL if you don't care.
- ▶ Value-result *address_len* must be set to the amount of space pointed to by *address* (or NULL).


connect

```
int connect(int socket, struct sockaddr *address, socklen_t
address_len);
```


- ▶ When called by a client, a connection is attempted to a listening socket on the server in *address*. Normally, the server *accepts* the connection and a communication channel is established.
- ▶ If *socket* is of type `SOCK_DGRAM`, *address* specifies the peer with which the socket is to be associated (datagrams are sent/received only to/from this peer).

TCP connection

Server Process



Client Process



request for connection establishment

request

response

Tips and warnings

- ▶ In Solaris compile with “-lsocket -lnsl”
- ▶ If a process attempts to write through a socket that has been closed by the other peer, a SIGPIPE signal is received.
- ▶ SIGPIPE is by default fatal, install a signal handler to override this.
- ▶ Use *netstat* to view the status of sockets.

```
ad@linux03 :~> netstat -ant
```

- ▶ When a server quits, the listening port remains busy (state TIME_WAIT) for a while
- ▶ Restarting the server fails in bind with “Bind: Address Already in Use”
- ▶ To override this use *setsockopt()* to enable SO_REUSEADDR

TCP server that receives a string and replies with the string capitalized.

```
/*inet_str_server.c: Internet stream sockets server */
#include <stdio.h>
#include <sys/wait.h>          /* sockets */
#include <sys/types.h>        /* sockets */
#include <sys/socket.h>       /* sockets */
#include <netinet/in.h>       /* internet sockets */
#include <netdb.h>            /* gethostbyaddr */
#include <unistd.h>           /* fork */
#include <stdlib.h>           /* exit */
#include <ctype.h>            /* toupper */
#include <signal.h>           /* signal */
void child_server(int newsock);
void perror_exit(char *message);
void sigchld_handler (int sig);

void main(int argc, char *argv[]) {
    int          port, sock, newsock;
    struct sockadr_in server, client;
    socklen_t clientlen = sizeof(client);
    struct sockadr *serverptr=(struct sockadr *)&server;
    struct sockadr *clientptr=(struct sockadr *)&client;
```

```
struct hostent *rem;
if (argc != 2) {
    printf("Please give port number\n");exit(1);}
port = atoi(argv[1]);
/* Reap dead children asynchronously */
signal(SIGCHLD, sigchld_handler);
/* Create socket */
if ((sock = socket(AF_INET, SOCK_STREAM, 0)) < 0)
    perror_exit("socket");
server.sin_family = AF_INET;          /* Internet domain */
server.sin_addr.s_addr = htonl(INADDR_ANY);
server.sin_port = htons(port);       /* The given port */
/* Bind socket to address */
if (bind(sock, serverptr, sizeof(server)) < 0)
    perror_exit("bind");
/* Listen for connections */
if (listen(sock, 5) < 0) perror_exit("listen");
```

```
printf("Listening for connections to port %d\n", port);
while (1) {
    /* accept connection */
    if ((newsock = accept(sock, clientptr, &clientlen))
        < 0) perror_exit("accept");
    /* Find client's address */
    printf("Accepted connection\n");
    switch (fork()) {      /* Create child for serving
                           client */
    case -1:      /* Error */
        perror("fork"); break;
    case 0:      /* Child process */
        close(sock); child_server(newsock);
        exit(0);
    }
    close(newsock); /* parent closes socket to client */
}
}
```

```

void child_server(int newsock) {
    char buf[1];
    while(read(newsock, buf, 1) > 0) { /* Receive 1 char */
        putchar(buf[0]); /* Print received char */
        /* Capitalize character */
        buf[0] = toupper(buf[0]);
        /* Reply */
        if (write(newsock, buf, 1) < 0)
            perror_exit("write");
    }
    printf("Closing connection.\n");
    close(newsock); /* Close socket */
}

/* Wait for all dead child processes */
void sigchld_handler (int sig) {
    while (waitpid(-1, NULL, WNOHANG) > 0);
}

void perror_exit(char *message) {
    perror(message);
    exit(EXIT_FAILURE);
}

```

TCP client example. (definitions)

```
/* inet_str_client.c: Internet stream sockets client */
#include <stdio.h>
#include <sys/types.h>           /* sockets */
#include <sys/socket.h>         /* sockets */
#include <netinet/in.h>        /* internet sockets */
#include <unistd.h>             /* read, write, close */
#include <netdb.h>              /* gethostbyaddr */
#include <stdlib.h>             /* exit */
#include <string.h>             /* strlen */

void perror_exit(char *message);

void main(int argc, char *argv[]) {
    int          port, sock, i;
    char         buf[256];
    struct sockaddr_in server;
    struct sockaddr *serverptr = (struct sockaddr*)&server;
    struct hostent *rem;
    if (argc != 3) {
        printf("Please give host name and port number\n");
        exit(1);}
}
```

TCP client example. (connection)

```
/* Create socket */
if ((sock = socket(AF_INET, SOCK_STREAM, 0)) < 0)
    perror_exit("socket");
/* Find server address */
if ((rem = gethostbyname(argv[1])) == NULL) {
    perror("gethostbyname"); exit(1);
}
port = atoi(argv[2]); /*Convert port number to integer*/
server.sin_family = AF_INET; /* Internet domain */
memcpy(&server.sin_addr, rem->h_addr, rem->h_length);
server.sin_port = htons(port); /* Server port */
/* Initiate connection */
if (connect(sock, serverptr, sizeof(server)) < 0)
    perror_exit("connect");
printf("Connecting to %s port %d\n", argv[1], port);
```

TCP client example. (transfer loop)

```
do {
    printf("Give input string: ");
    fgets(buf, sizeof(buf), stdin); /* Read from stdin*/
    for(i=0; buf[i] != '\0'; i++) { /* For every char */
        /* Send i-th character */
        if (write(sock, buf + i, 1) < 0)
            perror_exit("write");
        /* receive i-th character transformed */
        if (read(sock, buf + i, 1) < 0)
            perror_exit("read");
    }
    printf("Received string: %s", buf);
} while (strcmp(buf, "END\n") != 0); /* Finish on "end" */
close(sock); /* Close socket and exit */
}

void perror_exit(char *message)
{
    perror(message);
    exit(EXIT_FAILURE);
}
```

Execution

Server on linux02:

```
ad@linux02:~> ./server 9002
Listening for connections to port 9002
Accepted connection from linux03.di.uoa.gr
Hello world
EnD
Closing connection.
```

Client on linux03:

```
ad@linux03:~> ./client linux02.di.uoa.gr 9002
Connecting to linux02.di.uoa.gr port 9002
Give input string: Hello world
Received string: HELLO WORLD
Give input string: EnD
Received string: END
ad@linux03:~>
```


More useful functions

shutdown shut down part of a full-duplex connection

```
int shutdown(int socket, int how);
```

Can be used to tell server that we have sent the whole request.

getsockname get the current address of a socket

```
int getsockname(int socket, struct sockaddr *  
address, socklen_t *address_len);
```

getpeername get the name (address) of the peer connected to socket. (inverse of getsockname)


```
int getpeername(int socket, struct sockaddr *  
address, socklen_t *address_len);
```

Parsing and Printing Addresses

- `inet_ntoa` Convert struct `in_addr` to printable form 'a.b.c.d'
- `inet_addr` Convert IP address string in '.' notation to 32bit network address
- `inet_ntop` Convert address from network format to printable presentation format
- `inet_pton` Convert presentation format address to network format


Bonus: `inet_ntop` and `inet_pton` also work with IPv6!

Internet User Datagram Protocol (UDP)

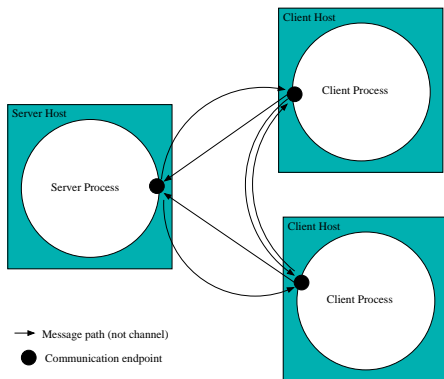

- ▶ no connections. Think postcards, not telephone.
- ▶ *Datagrams* (messages) exchanged.
- ▶ Datagrams get lost or arrive out of order

UDP communication

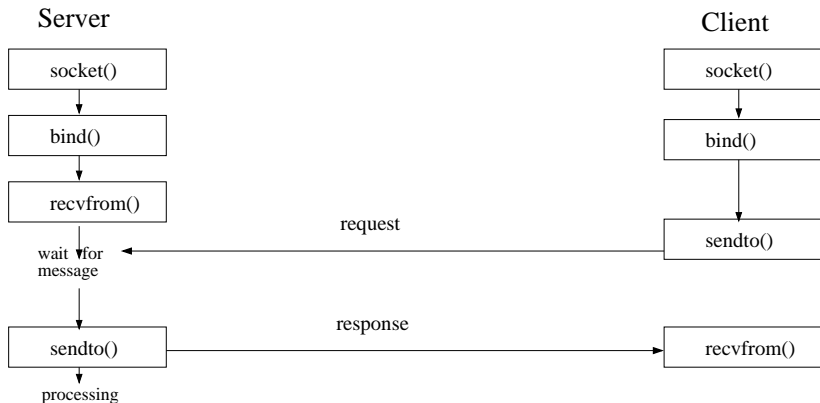

sendto, recvfrom

```
ssize_t sendto(int sock, void *buff, size_t length,  
int flags, struct sockaddr *dest_addr, socklen_t dest_len);
```

- ▶ Send a message from a socket
- ▶ Similar to write() & send() (which we haven't seen) but allows to specify destination

```
ssize_t recvfrom(int socket, void *buff, size_t length,  
int flags, struct sockaddr *addr, socklen_t *address_len);
```

- ▶ Receive a message from a socket
- ▶ Similar to read() & recv() (which we haven't seen) but allows to get the source address
- ▶ address_len is value-result and must be initialized to the size of the buffer pointed to by the address pointer
- ▶ last two arguments can be NULL

Usually flags = 0. Rarely used (e.g., Out Of Band data)

A simple echoing UDP server

Client on linux03 (needs to be given the server's port#):

```
ad@linux03:~> fortune | ./inet_dgr_client linux02 59579
Hlade's Law:
    If you have a difficult task, give it to a lazy person
    --
    they will find an easier way to do it.
ad@linux03:~>
```

Server on linux02:

```
ad@linux02:~> ./inet_dgr_server
Socket port: 59579
Received from linux03: Hlade's Law:
Received from linux03:  If you have a difficult task, give
    it to a lazy person --
Received from linux03:  they will find an easier way to do
    it.
```

```

/* inet_dgr_server.c: Internet datagram sockets server */
#include <sys/types.h> /* sockets */
#include <sys/socket.h> /* sockets */
#include <netinet/in.h> /* Internet sockets */
#include <netdb.h> /* gethostbyaddr */
#include <arpa/inet.h> /* inet_ntoa */
#include <stdio.h>
#include <stdlib.h>
void perror_exit(char *message);
char *name_from_address(struct in_addr addr) {
    struct hostent *rem; int asize = sizeof(addr.s_addr);
    if((rem = gethostbyaddr(&addr.s_addr, asize, AF_INET)))
        return rem->h_name; /* reverse lookup success */
    return inet_ntoa(addr); /* fallback to a.b.c.d form */
}
void main() {
    int n, sock; unsigned int serverlen, clientlen;
    char buf[256], *clientname;
    struct sockaddr_in server, client;
    struct sockaddr *serverptr = (struct sockaddr*) &server;
    struct sockaddr *clientptr = (struct sockaddr*) &client;
    /* Create datagram socket */
    if ((sock = socket(AF_INET, SOCK_DGRAM, 0)) < 0)
        perror_exit("socket");
}

```

```

/* Bind socket to address */
server.sin_family = AF_INET;           /* Internet domain */
server.sin_addr.s_addr = htonl(INADDR_ANY);
server.sin_port = htons(0);           /* Autoselect a port */
serverlen = sizeof(server);
if (bind(sock, serverptr, serverlen) < 0)
    perror_exit("bind");
/* Discover selected port */
if (getsockname(sock, serverptr, &serverlen) < 0)
    perror_exit("getsockname");
printf("Socket port: %d\n", ntohs(server.sin_port));
while(1) { clientlen = sizeof(client);
    /* Receive message */
    if ((n = recvfrom(sock, buf, sizeof(buf), 0,
        clientptr, &clientlen)) < 0)
        perror("recvfrom");
    buf[sizeof(buf)-1]='\0'; /* force str termination */
    /* Try to discover client's name */
    clientname = name_from_address(client.sin_addr);
    printf("Received from %s: %s\n", clientname, buf);
    /* Send message */
    if (sendto(sock, buf, n, 0, clientptr, clientlen)<0)
        perror_exit("sendto");
}}

```



```

/* inet_dgr_client.c: Internet datagram sockets client */
#include <sys/types.h> /* sockets */
#include <sys/socket.h> /* sockets */
#include <netinet/in.h> /* Internet sockets */
#include <netdb.h> /* gethostbyname */
#include <stdio.h>
#include <stdlib.h>
#include <string.h>

void main(int argc, char *argv[]) {
    int sock; char buf[256]; struct hostent *rem;
    struct sockaddr_in server, client;
    unsigned int serverlen = sizeof(server);
    struct sockaddr *serverptr = (struct sockaddr *) &server;
    struct sockaddr *clientptr = (struct sockaddr *) &client;
    if (argc < 3) {
        printf("Please give host name and port\n"); exit(1);}
    /* Create socket */
    if ((sock = socket(AF_INET, SOCK_DGRAM, 0)) < 0) {
        perror("socket"); exit(1); }
    /* Find server's IP address */
    if ((rem = gethostbyname(argv[1])) == NULL) {
        perror("gethostbyname"); exit(1); }
}


```

```

/* Setup server's IP address and port */
server.sin_family = AF_INET;          /* Internet domain */
memcpy(&server.sin_addr, rem->h_addr, rem->h_length);
server.sin_port = htons(atoi(argv[2]));
/* Setup my address */
client.sin_family = AF_INET;          /* Internet domain */
client.sin_addr.s_addr=htonl(INADDR_ANY); /*Any address*/
client.sin_port = htons(0);          /* Autoselect port */
/* Bind my socket to my address*/
if (bind(sock, clientptr, sizeof(client)) < 0) {
    perror("bind"); exit(1); }
/* Read continuously messages from stdin */
while (fgets(buf, sizeof buf, stdin)) {
    buf[strlen(buf)-1] = '\0';        /* Remove '\n' */
    if (sendto(sock, buf, strlen(buf)+1, 0, serverptr,
        serverlen) < 0) {
        perror("sendto"); exit(1); } /* Send message */
    bzero(buf, sizeof buf);          /* Erase buffer */
    if (recvfrom(sock, buf, sizeof(buf), 0, NULL, NULL) <
        0) {
        perror("recvfrom"); exit(1); } /* Receive message */
    printf("%s\n", buf);
}
}

```

- ▶ Everything looks good and runs ok BUT there is a **BUG!**
- ▶ Remember that UDP is *unreliable*



rlsd: a remote ls server - with paranoia

Server on linux02:

```
ad@linux02:~> ./rlsd
```

Client on linux03:

```
ad@linux03:~> ./rls linux02.di.uoa.gr /usr/share/dict
README
connectives
propernames
web2
web2a
words
ad@linux03:~>
```

rlsd.c remote ls server with paranoia (TCP)

Demonstrates interesting calls

`fdopen` allows buffered I/O by opening socket as file stream

`popen` pipe+fork+execute command together

```
/* rlsd.c - a remote ls server - with paranoia */
#include <stdio.h>
#include <stdlib.h>
#include <unistd.h>
#include <sys/types.h>
#include <sys/socket.h>
#include <netinet/in.h>
#include <netdb.h>
#include <time.h>
#include <string.h>
#include <ctype.h>
#define PORTNUM 15000 /* rlsd listens on this port */

void perror_exit(char *msg);
void sanitize(char *str);
```

```

int main(int argc, char *argv[]) {
    struct sockaddr_in myaddr; /* build our address here */
    int c, lsock, csock; /* listening and client sockets */
    FILE *sock_fp; /* stream for socket IO */
    FILE *pipe_fp; /* use popen to run ls */
    char dirname[BUFSIZ]; /* from client */
    char command[BUFSIZ]; /* for popen() */

    /** create a TCP a socket **/
    if ((lsock = socket( AF_INET, SOCK_STREAM, 0)) < 0)
        perror_exit( "socket" );
    /** bind address to socket. **/
    myaddr.sin_addr.s_addr = htonl(INADDR_ANY);
    myaddr.sin_port = htons(PORTNUM); /*port to bind socket*/
    myaddr.sin_family = AF_INET; /* internet addr family */
    if(bind(lsock, (struct sockaddr*)&myaddr, sizeof(myaddr)))
        perror_exit( "bind" );
    /** listen for connections with Qsize=5 **/
    if ( listen(lsock, 5) != 0 )
        perror_exit( "listen" );

```

```

while ( 1 ){ /* main loop: accept - read - write */
    /* accept connection, ignore client address */
    if ( (csock = accept(lsock, NULL, NULL)) < 0 )
        perror_exit("accept");
    /* open socket as buffered stream */
    if ((sock_fp = fdopen(csock, "r+")) == NULL)
        perror_exit("fdopen");
    /* read dirname and build ls command line */
    if (fgets(dirname, BUFSIZ, sock_fp) == NULL)
        perror_exit("reading dirname");
    sanitize(dirname);
    snprintf(command, BUFSIZ, "ls %s", dirname);
    /* Invoke ls through popen */
    if ((pipe_fp = popen(command, "r")) == NULL )
        perror_exit("popen");
    /* transfer data from ls to socket */
    while( (c = getc(pipe_fp)) != EOF )
        putc(c, sock_fp);
    pclose(pipe_fp);
    fclose(sock_fp);
}
return 0;
}

```

```
/* it would be very bad if someone passed us an dirname like  
 * "; rm *" and we naively created a command "ls ; rm *".  
 * So..we remove everything but slashes and alphanumerics.  
 */  
void sanitize(char *str)  
{  
    char *src, *dest;  
    for ( src = dest = str ; *src ; src++ )  
        if ( *src == '/' || isalnum(*src) )  
            *dest++ = *src;  
    *dest = '\0';  
}  
  
/* Print error message and exit */  
void perror_exit(char *message)  
{  
    perror(message);  
    exit(EXIT_FAILURE);  
}
```


`rls.c` sends a directory name to `rlsd` and reads back a directory listing (TCP)

`write_all` guarantees to send all the bytes requested, provided no error occurs, by repeatedly calling `write()`

```
#include <sys/types.h> /* sockets */
#include <sys/socket.h> /* sockets */
#include <netinet/in.h> /* internet sockets */
#include <netdb.h> /* gethostbyname */
#define PORTNUM 15000
#define BUFSIZE 256
void perror_exit(char *msg);

/* Write() repeatedly until 'size' bytes are written */
int write_all(int fd, void *buff, size_t size) {
    int sent, n;
    for(sent = 0; sent < size; sent+=n) {
        if ((n = write(fd, buff+sent, size-sent)) == -1)
            return -1; /* error */
    }
    return sent;
}
```

```

int main(int argc, char *argv[]) {
    struct sockaddr_in servadd; /* The address of server */
    struct hostent *hp;        /* to resolve server ip */
    int sock, n_read;         /* socket and message length */
    char buffer[BUFFSIZE];    /* to receive message */

    if ( argc != 3 ) {
        puts("Usage: rls <hostname> <directory>");exit(1);}
    /* Step 1: Get a socket */
    if ((sock = socket(AF_INET, SOCK_STREAM, 0)) == -1 )
        perror_exit( "socket" );
    /* Step 2: lookup server's address and connect there */
    if ((hp = gethostbyname(argv[1])) == NULL) {
        perror("gethostbyname"); exit(1);}
    memcpy(&servadd.sin_addr, hp->h_addr, hp->h_length);
    servadd.sin_port = htons(PORTNUM); /* set port number */
    servadd.sin_family = AF_INET ;    /* set socket type */
    if (connect(sock, (struct sockaddr*) &servadd,
                sizeof(servadd)) !=0)
        perror_exit( "connect" );
}

```

```
/* Step 3: send directory name + newline */
if ( write_all(sock, argv[2], strlen(argv[2])) == -1)
    perror_exit("write");
if ( write_all(sock, "\n", 1) == -1 )
    perror_exit("write");
/* Step 4: read back results and send them to stdout */
while( (n_read = read(sock, buffer, BUFSIZE)) > 0 )
    if (write_all(STDOUT_FILENO, buffer, n_read)<n_read)
        perror_exit("fwrite");
close(sock);
return 0;
}
```

The ROCK PAPER SCISSORS game

- ▶ One referee process.
- ▶ Two players: a local process (playing random), a remote process (accepting input)
- ▶ Referee talks to the local process through pipes
- ▶ Referee talks to the remote process through sockets

Server

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <unistd.h>
#include <sys/wait.h>           /* For wait */
#include <sys/types.h>         /* For sockets */
#include <sys/socket.h>        /* For sockets */
#include <netinet/in.h>        /* For Internet sockets */
#include <netdb.h>             /* For gethostbyname */

#define READ    0
#define WRITE   1

int read_data (int fd, char *buffer);
int write_data (int fd, char* message);
void prs (int *score1, int *score2, int len1, int len2);
```

```

int main(int argc, char *argv[])
{
    int n, port, sock, newsock;
    int i, pid, fd1[2], fd2[2], option, status;
    int score1=0, score2=0;          /* Score variables */
    char buf[60], buf2[60], buf3[60]; /* Buffers */
    char *message[] = { "ROCK", "PAPER", "SCISSORS" }; /*
        prs options */

    unsigned int serverlen, clientlen; /* Server - client
        variables */
    struct sockaddr_in server, client;
    struct sockaddr *serverptr, *clientptr;
    struct hostent *rem;

    if ( argc < 3 ){                /* At least 2 arguments */
        fprintf(stderr, "usage: %s <n> <port>\n", argv[0]);
        exit(0);
    }

    n = atoi(argv[1]);              /* Number of games */
    port = atoi(argv[2]);           /* Port */

```

```
if ((sock = socket(AF_INET, SOCK_STREAM, 0)) == -1){
    /* Create socket */
    perror("socket");
    exit(-1);
}
server.sin_family = AF_INET;      /* Internet domain */
server.sin_addr.s_addr = htonl(INADDR_ANY);
server.sin_port = htons(port);    /* The given port */
serverptr = (struct sockaddr *) &server;
serverlen = sizeof server;
if (bind(sock, serverptr, serverlen) < 0){
    perror("bind"); exit(-1);
}
if (listen(sock, 5) < 0){
    perror("listen"); exit(-1);
}

printf("I am the referee with PID %d waiting for game
request at port %d\n", (int) getpid(), port);
```

```
if (pipe (fd1) == -1){ /* First pipe: parent -> child
*/
    perror("pipe");exit(-1);
}
if (pipe (fd2) == -1){ /* Second pipe: child -> parent
*/
    perror("pipe");exit(-1);
}

if ((pid = fork()) == -1) /* Create child for player
1 */
{
    perror("fork");exit(-1);
}
```



```

if ( !pid ){          /* Child process */
    close(fd1[WRITE]);close(fd2[READ]); /* Close unused
        */
    srand (getppid());
    printf("I am player 1 with PID %d\n", (int) getpid()
        );
    for(;;)          /* While read "READY" */
    {
        read_data (fd1[READ], buf); /* Read "READY" or "
            STOP" */
        option = rand()%3;
        if ( strcmp("STOP", buf)){ /* If != "STOP" */
            write_data (fd2[WRITE], message[option]);
                /* Send random option */
            read_data (fd1[READ], buf); /* Read result
                of this game */
            printf ("%s", buf);        /* Print result */
        }else
            break;
    }
    read_data (fd1[READ], buf); /* Read final result */
    printf("%s", buf); /* Print final result */
    close(fd1[READ]); close(fd2[WRITE]);
}

```

```
else{          /* Parent process */
    clientptr = (struct sockaddr *) &client;
    clientlen = sizeof client;
    close(fd1[READ]); close(fd2[WRITE]);
    printf("Player 1 is child of the referee\n");
    if ((newsock = accept(sock, clientptr, &clientlen))
        < 0){
        perror("accept"); exit(-1);
    }
    if ((rem = gethostbyaddr((char *) &client.sin_addr.
        s_addr, sizeof client.sin_addr.s_addr, client.
        sin_family)) == NULL) {
        perror("gethostbyaddr");exit(-1);
    }
}
```

```
printf("Player 2 connected %s\n",rem->h_name);
write_data (newsock, "2"); /* Send player's ID (2)
*/
for(i = 1; i <= n; i++){
    write_data (fd1[WRITE], "READY");
    write_data (newsock, "READY");
    read_data (fd2[READ], buf);
    read_data (newsock, buf2);
    /* Create result string */
    sprintf (buf3, "Player 1:%10s\tPlayer 2:%10s\n",
            buf, buf2);
    write_data (fd1[WRITE], buf3);
    write_data (newsock, buf3);
    prs(&score1, &score2, strlen(buf), strlen(buf2));
}
```

```

/* Calculate final results for each player */
if ( score1 == score2 ){
    sprintf(buf, "Score = %d - %d (draw)\n", score1,
            score2);
    sprintf(buf2, "Score = %d - %d (draw)\n", score1
            , score2);
}else if (score1 > score2 ){
    sprintf(buf, "Score = %d - %d (you won)\n",
            score1, score2);
    sprintf(buf2, "Score = %d - %d (player 1 won)\n"
            , score1, score2);
}else{
    sprintf(buf, "Score = %d - %d (player 2 won)\n",
            score1, score2);
    sprintf(buf2, "Score = %d - %d (you won)\n",
            score1, score2);
}
write_data (fd1[WRITE], "STOP");
write_data (fd1[WRITE], buf);
close(fd1[WRITE]); close(fd2[READ]);
wait(&status); /* Wait child */
write_data (newsock, "STOP");
write_data (newsock, buf2);
close(newsock); /* Close socket */

```

```

int read_data (int fd, char *buffer){/* Read formatted data
*/
char temp;int i = 0, length = 0;
if ( read ( fd, &temp, 1 ) < 0 )      /* Get length of
string */
    exit (-3);
length = temp;
while ( i < length )      /* Read $length chars */
    if ( i < ( i+= read (fd, &buffer[i], length - i)))
        exit (-3);
return i;      /* Return size of string */
}
int write_data ( int fd, char* message ){/* Write formatted
data */
char temp; int length = 0;
length = strlen(message) + 1;      /* Find length of string
*/
temp = length;
if( write (fd, &temp, 1) < 0 )      /* Send length first */
    exit (-2);
if( write (fd, message , length) < 0 )      /* Send string
*/
    exit (-2);
return length;      /* Return size of string */
}

```

```
void prs(int *score1, int *score2, int len1, int len2) /*  
    Calculate score */  
{  
    int result = len1 - len2; /* len1 = buf1 length, len2 =  
        buf2 length */  
    if (result == 3 || result == 1 || result == -4) /* 1st  
        player wins */  
        (*score1)++;  
    else if (result) /* 2nd player wins */  
        (*score2)++;  
    return;  
}
```

Client

```
#include <stdio.h>
#include <stdlib.h>
#include <string.h>
#include <strings.h>          /* For bcopy */
#include <unistd.h>
#include <sys/wait.h>        /* For wait */
#include <sys/types.h>       /* For sockets */
#include <sys/socket.h>      /* For sockets */
#include <netinet/in.h>     /* For Internet sockets */
#include <netdb.h>          /* For gethostbyname */

int read_data (int fd, char *buffer);
int write_data (int fd, char* message);
```

```

int main (int argc, char *argv[])
{
    int i, port, sock, option;
    char opt[3], buf[60], *message [] = { "PAPER", "ROCK", "
        SCISSORS" };
    unsigned int serverlen;
    struct sockaddr_in server;
    struct sockaddr *serverptr;
    struct hostent *rem;
    if (argc < 3){ /* At least 2 arguments */
        fprintf(stderr, "usage: %s <domain> <port>\n", argv
            [0]);
        exit(-1);
    }
    if ((sock = socket(AF_INET, SOCK_STREAM, 0)) < 0){
        perror("socket");
        exit(-1);
    }
    if ((rem = gethostbyname(argv[1])) == NULL){ /* Find
        server address */
        perror("gethostbyname");
        exit(-1);
    }
}

```



```
port = atoi(argv[2]);
server.sin_family = AF_INET;
bcopy((char *) rem -> h_addr, (char *) &server.sin_addr,
      rem -> h_length);
server.sin_port = htons(port);
serverptr = (struct sockaddr *) &server;
serverlen = sizeof server;
if (connect(sock, serverptr, serverlen) < 0){
    perror("connect");exit(-1);
}

read_data (sock, buf); /* Read player's ID (1 or 2) */
printf("I am player %d with PID %d\n", buf[0]-'0', (int)
      getpid());
```

```

for ( i = 1; ; i++ ){/* While read "READY" */
    read_data (sock, buf); /* Read "READY" or "STOP" */
    if ( strcmp("STOP", buf) ){ /* If != "STOP" */
        printf("Give round %d play: ", i);
        scanf("%s", opt);
        switch (*opt){ /* First letter of opt */
            /* Note: The other 2 are \n and \0 */
            case 'p':option = 0; break;
            case 'r':option = 1; break;
            case 's':option = 2; break;
            default: fprintf(stderr, "Wrong option %c\n"
                , *opt);
                option = ((int)*opt)%3; break;
        }
        write_data (sock, message[option]);
        read_data (sock, buf);
        printf ("%s", buf);
    }else break;
}
read_data (sock, buf); /* Read final score */
printf("%s", buf);
close(sock);
return 0;
}

```

Server

```
jackal@jackal-laptop:~/Set006/src$ ./prsref 3 2323
I am the referee with PID 4587 waiting for game request at
port 2323
I am player 1 with PID 4588
Player 1 is child of the referee
Player 2 connected localhost
Player 1:      PAPER      Player 2:      PAPER
Player 1:  SCISSORS      Player 2:  SCISSORS
Player 1:      ROCK      Player 2:  SCISSORS
Score = 1 - 0 (you won)
```

Client

```
jackal@jackal-laptop:~/Set006/src$ ./prs localhost 2323
I am player 2 with PID 4615
Give round 1 play: p
Player 1:      PAPER      Player 2:      PAPER
Give round 2 play: s
Player 1:  SCISSORS      Player 2:  SCISSORS
Give round 3 play: s
Player 1:      ROCK      Player 2:  SCISSORS
Score = 1 - 0 (player 1 won)
```